
Туре СОМ

Designed for use with the ComFlor[®] 60, ComFlor[®] 80 and ComFlor[®] 95 decking profiles manufactured by Tata Steel.



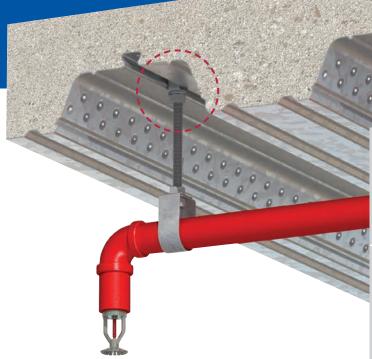


UK C C For Characteristic Resistances when designing a connection to Eurocode 3, refer to DoP No.023 (CE) or DoP No.123 (UKCA) on Lindapter's website or request a DoP Brochure.

Locking Plate: Pre-galvanised strip. Wedge: Cold formed steel, zinc plated.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1) Tensile / 1 Rod kN	Tightening Torque Nm
COM10	M10	1.25	10

Opening: 15mm (+/-1mm)


Independently fire tested in accordance with BS EN 1991-1-2. For fire ratings please refer to www.Lindapter.com

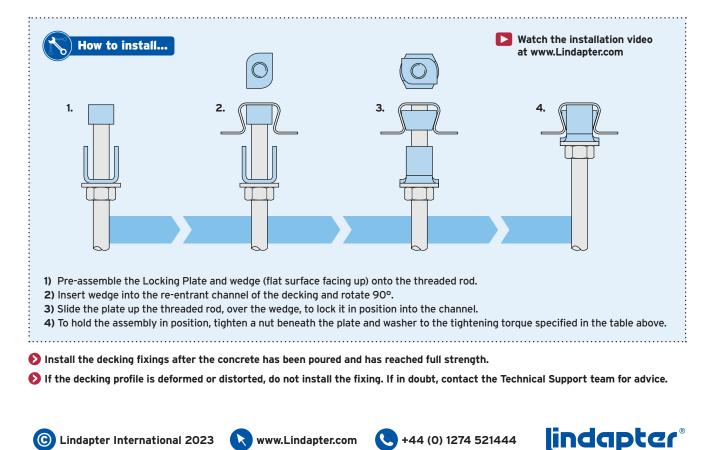



Decking Fixings

High quality, cost effective connections for securing building services. Designed to fit inside the dovetail re-entrant channels of popular composite decking profiles, Lindapter's fixings provide a zero-impact method that avoids delamination and damage to the decking.

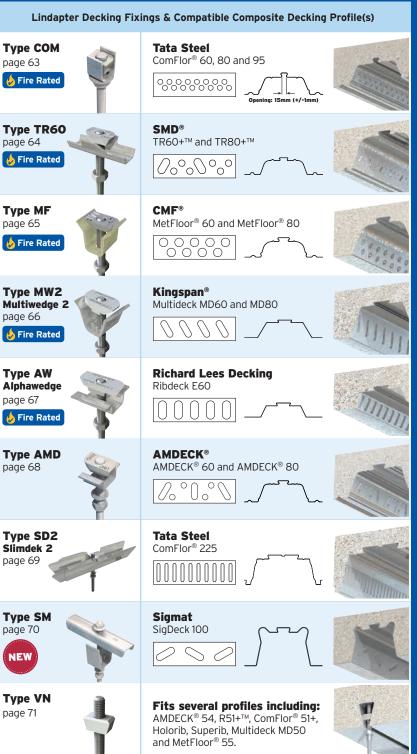

lindapter[®] C +44 (0) 1274 521444



www.Lindapter.com

C Lindapter International 2023

Ref: LindUKMay23