

STUD WALL BRACKETS

DATA SHEET & INSTALLATION

Description

For fast and easy mounting of service boxes in stud wall cavities. Can be used in timber stud or aluminium stud walls. Removes the need to cut timber noggins to fit services to. Simply screws into place either inside or on face of studs.


Adjustable for stud gaps between 275 and 600mm

Installation

Simply bend the ends to match the desired depth of stud and fixings, adjust the length to fit the stud spacing and screw into place using our self drill wafer head screws or timber screws depending on application.

Finish

Pre Galvanised Steel

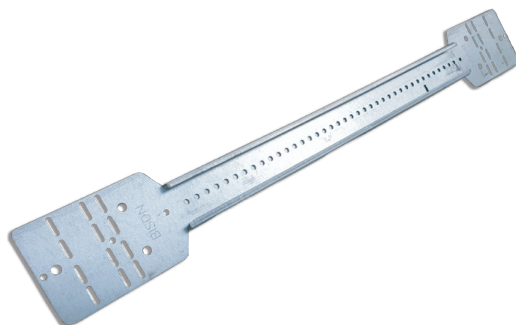

Stock Code	Size	Pack Qty
S561-603	275-450mm	Box of 50
S561-613	400-600mm	Box of 50

Related Products

Self Drill Wafer Head Screws - U431-407, U431-410, U431-412

Additional Information

It is certified that the material described above fully conforms to IS277. Chemical composition and Mechanical properties of the product, as tested in accordance with the scheme of testing & inspection contained in the BIS certification marks licence No. CM/L-4797392

